

Applicable for hydraulic and pneumatic application

Pressure Transmitter

MPM4511A



Application

- Aerial work platform hydraulic system
- Hydraulic and pneumatic system
- Energy and water treatment system
- Refrigeration System
- Industrial process control and automatic detection system
- Pumps or compressors
- HVAC
- Hydraulic servo control system for injection molding machine

Introduction

MPM4511A type pressure transmitter adopts a microfused pressure sensor with the compact structure and is highly resistant to vibration, shock and overload. The product also features digital calibration and temperature compensation, and dual output circuitry with high safety, has superior anti-interference and temperature resistance.

MPM4511A type pressure transmitter has many international certifications, is suitable to be mass produced cost-effectively, and can be widely used in hydraulic and pneumatic fields.



Feature

Range	0bar ~ 16bar ...600bar
Over pressure	See measured range
Pressure type	Gauge, Sealed gauge
Accuracy	±0.5%FS (@25°C)
Long-term stability	±0.25%FS/Year
Electrical connection	Cable (B2)
	M12×1 4-pin plug (B4)
	M12×1 5-pin plug (B9)
	Packard plug (B5)
Process connection	G1/4 A ISO 1179-2
	M14×1.5 ISO 9974-2
Supply voltage	5V±0.1V DC
	8V ~ 33V DC
	9V ~ 36V DC
	12V ~ 33V DC
Output Signal	0V ~ 10V DC
	0.5V ~ 4.5V DC
	4mA ~ 20mA DC
	4mA ~ 20mA & 20mA ~ 4mA DC(Dual Output)
Working temperature	0.5V ~ 4.5V & 4.5V ~ 0.5V DC (Dual Output)
	-40°C ~ 125°C (Single Output)
Response frequency	-40°C ~ 85°C (Dual Output)
	4ms (Single Output)
Vibration	7ms (Dual Output)
	20g, 10Hz ~ 2000Hz
Shock	100g, 11ms
Protection grade	IP67

Measured Range

Unit	Measured Range	Over pressure	Burst pressure
bar	0 ~ 16	3FS (48)	5FS (80)
	0 ~ 50	3FS (150)	5FS (250)
	0 ~ 250	2FS (500)	5FS (1250)
	0 ~ 350	2FS(700)	4FS(1400)
	0 ~ 600	2FS(1200)	3FS(1800)

Output Signal

Type	Output Signal	Supply Voltage
Single current output (2-wire)	4mA ~ 20mA DC	8V ~ 33V DC
Single voltage output (3-wire)	0V ~ 10V DC	12V ~ 33V DC
	0.5V ~ 4.5V DC	8V ~ 33V DC
	0.5V ~ 4.5V DC	5V±0.1V DC
Dual current output (3-wire)	4mA ~ 20mA & 20mA ~ 4mA DC	9V ~ 36V DC
Dual voltage output (3-wire)	0.5V ~ 4.5V & 4.5V ~ 0.5V DC	9V ~ 36V DC

Output Load (Ω)
 Current(2-wire) : ≤ (U-8)/0.02A
 Current(3-wire) : ≤ (U-9)/0.024A
 Voltage(3-wire) : > 10k

Accuracy

Accuracy grade	0.5
Accuracy	≤0.5%
Repeatability	≤0.2%
Non-linearity (BSFL)	≤±0.25%

Total Error
 25°C ≤ ± 0.5%FS
 -10°C～ 80°C ≤ ± 1%FS

EMC

SN	Test Items	Standard
1	Electrostatic Discharge Immunity	GB/T 17626.2/IEC 61000-4-2
2	Radio-frequency Field	GB/T 17626.3/IEC 61000-4-3
3	Power Frequency Magnetic Field	GB/T 17626.8/IEC 61000-4-8
4	Immunity of Electrical Fast Pulse Group	GB/T 17626.4/IEC 61000-4-4
5	Surge Immunity	GB/T 17626.5/IEC 61000-4-5
6	RF Induction Conduction Anti-interference	GB/T 17626.6/IEC 61000-4-6

Environmental Conditions

Items	Single Output	Dual Output
Media Temperature	-40°C～ 125°C	-40°C～ 85°C
Environmental Temperature	-40°C～ 125°C	-40°C～ 85°C
Storage Temperature	-40°C～ 125°C	-40°C～ 125°C
Relative Humidity	5% ~ 95%	5% ~ 95%

It is required that the measured medium must not be solidified, or partially solidified during the operation of the pressure transmitter.

Working Condition

Protection Grade
 IP67

Atmospheric pressure
 0.86bar ~ 1.06bar

Vibration
 20g, 10Hz ~ 2000Hz (GB/T2423.10/IEC60068-2-6)

Shock
 100g, 11ms (GB/T2423.5/IEC60068-2-27)

Material
Wetted Parts
 Isolated diaphragm: 17-4PH
 Pressure port: Stainless Steel 304


Seal
 FVMQ (As per DIN 3869)

Non-wetted Parts
 Housing: Stainless Steel 304
 Cable: Φ5 mm Polyurethane
 M12 Plug: Stainless Steel 304

Approvals

Mark	Instruction	Country/region
	EU Declaration of Conformity EMC Directive, Electromagnetic Emission and Immunity Standard Pressure Equipment Directive	EU
	UK Conformity Assessment	UK
	RoHS Compliance	EU
	RUS Conformity Assessment	RUS
PLd	Protection Level d (Dual-output)	SUD

Electrical Connection


Signal	B2 (cable)				B4 (M12×1 4-pin)		B9 (M12×1 5-pin)		B5 (Packard)	
	/									
	Single Output		Dual Output		Single Output		Dual Output		Single Output	
	Current 2-Wire	Voltage 3-Wire	Current 3-Wire	Voltage 3-Wire	Current 2-Wire	Voltage 3-Wire	Current 3-Wire	Voltage 3-Wire	Current 2-Wire	Voltage 3-Wire
+V	Red	Red	Red	Red	1	1	1	1	B	B
+OUT	Black	Black	Black (+OUT 1) White (+OUT 2)	Black (+OUT 1) White (+OUT 2)	4	4	4(+OUT 1) 2(+OUT 2)	4(+OUT 1) 2(+OUT 2)	A	C
GND	Null	Blue	Green	Green	Null	3	3	3	空	A

Functional safety (Dual Output)


Standard	Description	Current output type	Voltage output type
EN ISO 13849-1:2015	Performance Level (PL)	d	d
	Category (Cat.)	2	2
	Avg. Diagnostic Coverage (DCavg)	90%	90%
	Common Cause Failures (CCF)	75 points	75 points
	Mean Time To dangerous Failure (MTTFD)	758 years	522 years

Dimension


Unit: mm

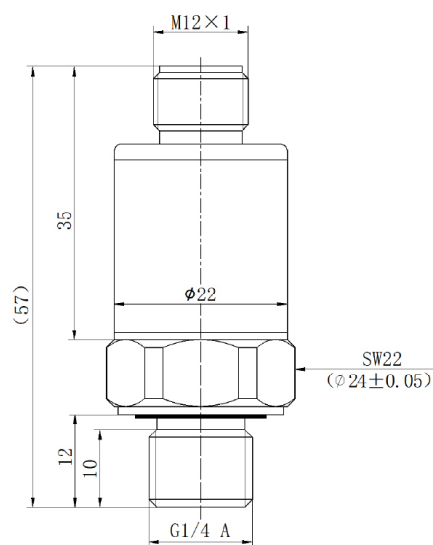


B4(M12x1 4-pin)

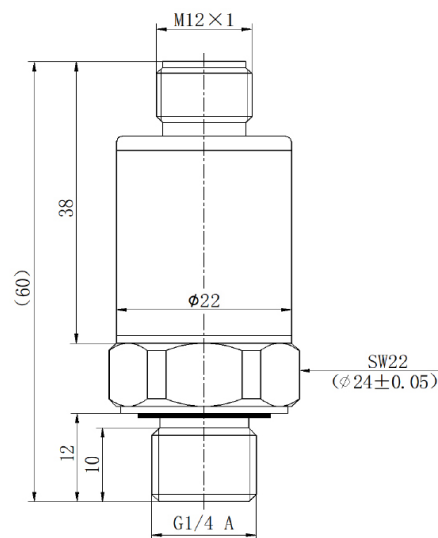

B9(M12x1 5-pin)

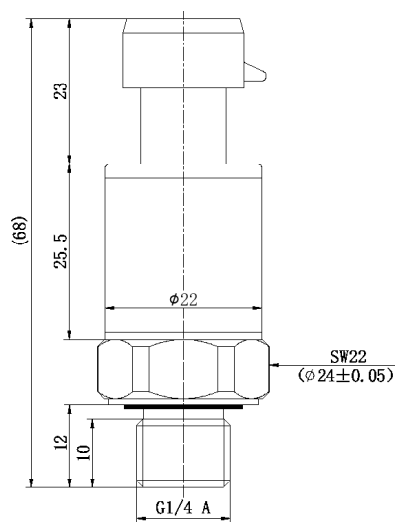


B5(Packard)

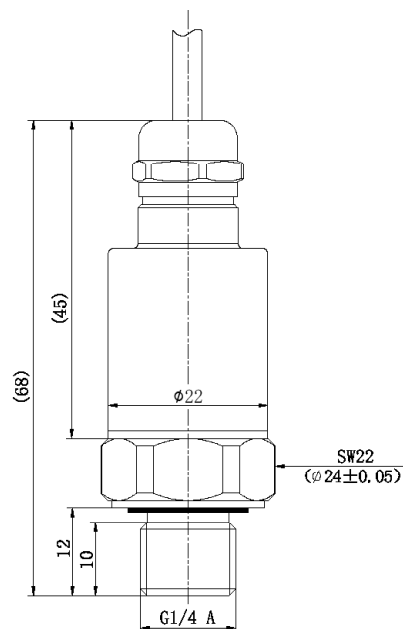


B2(Cable)

Process Connection

Unit: mm

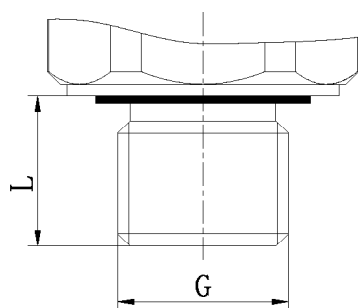

G	L	Standard
G 1/4 A (C2)	12	ISO 1179-2

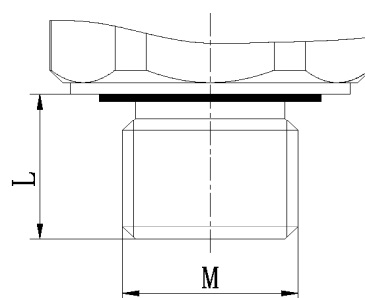

M	L	Standard
M14x1.5 (C18)	12	ISO 9974-2

Pressure Port

For suitable process connections, it includes a pressure port (pressure hole with damping) as standard: $\Phi 0.5\text{mm}$.

Order Guide

MPM4511A	Pressure Transmitter									
	Range	Measured Range 0bar ~ 16bar...600bar								
	[0 ~ X]bar	X: Actual measured range								
		Code	Electrical connection							
		B2	Cable							
		B4	M12×1 4-pin plug (Only Single Output)							
		B9	M12×1 5-pin plug (Only Dual Output)							
		B5	Packard Plug (Only Single Output)							
		Code	Output signal							
		E	4mA ~ 20mA DC							
		V	0V ~ 10V DC							
		K	0.5V ~ 4.5V DC							
		DE	4mA ~ 20mA & 20mA ~ 4mA DC							
		DK	0.5V ~ 4.5V & 4.5V ~ 0.5V DC							
		Code	Power Supply							
		V6	5V±0.1V DC (Only Code K)							
		V18	8V ~ 33V DC (Only Code E, K)							
		V21	12V ~ 33V DC (Only Code V)							
		V28	9V ~ 36V DC (Only Code DE, DK)							
		Code	Process Connection							
		C2	G1/4 A (Standard: ISO 1179-2 End face seal)							
		C18	M14×1.5 (Standard: ISO 9974-2 End face seal)							
		Code	Cable (m)							
		N	Null							
		L0D5	0.5							
		L001	1							
		L1D5	1.5							
		L002	2							
		L003	3							
		L008	8							
	L010	10								
	Code	Pressure Type								
	G	Gauge (16bar ≤ Range ≤ 35bar)								
	S	Sealed Gauge (35bar < Range ≤ 600bar)								
MPM4511A	[0 ~ 16]bar	B4	E	V18	C2	N	G	Complete P/N		

Order Note

1. Please be careful that the measured media should be compatible with the material of wetted part, The maximum torque during the installation and uninstallation of the transmitter is about 20N•m ~ 25N•m.
2. The total error ≤ ± 2%FS (@-40°C ~ 125°C) for Single Output standard products. The total error ≤ ± 2%FS (@-40°C ~ 85°C) for Dual Output standard products. For special requirements, please contact us for availability;
3. The measuring range of Dual-Output instruments is limited to 250 bar~350 bar. For any other range, please feel free to consult us for customization.